

PROXES® R888™

PROXES® R888™

	SIZE	CODE	1/32	OD	SEC	SLR	REVS	RIM WIDTHS	LIST
13	185/60R13	168280	6	21.6	7.3	9.9	597	5.50 5.0-6.5	\$264
	205/60R13	168270	6	22.6	8.2	10.2	572	6.00 5.5-7.5	\$268
	225/45R13	169360	6	20.8	8.8	9.6	620	7.50 7.0-8.5	\$284
14	205/55R14	168060	6	22.8	8.4	10.4	566	6.50 5.5-7.5	\$276
	225/50R14	168070	6	22.8	9.3	10.4	565	7.00 6.0-8.0	\$279
15	195/55R15	155120	6	23.3	8.0	10.7	554	6.00 5.5-7.0	\$282
	195/50R15	160560	6	22.5	7.9	10.4	573	6.00 5.5-7.0	\$286
	205/50R15	168200	6	23.0	8.5	10.6	561	6.50 5.5-7.5	\$295
	225/50R15	160680	6	23.7	9.1	10.9	544	7.00 6.0-8.0	\$324
	235/50R15	162860	6	24.2	9.6	11.1	534	7.50 6.5-8.5	\$341
	225/45ZR15	168020	6	22.8	8.9	10.5	566	7.50 7.0-8.5	\$341
16	205/55ZR16	168220	6	24.7	8.4	11.4	522	6.50 5.5-7.5	\$378
	195/50ZR16	168290	6	23.5	7.9	11.0	549	6.00 5.5-7.0	\$364
	225/50ZR16	168150	6	24.7	9.3	11.4	522	7.00 6.0-8.0	\$389
	255/50ZR16	168050	6	25.9	10.6	11.8	499	8.00 7.0-9.0	\$414
	225/45ZR16	168260	6	23.8	9.0	11.0	542	7.50 7.0-8.5	\$410
	245/45ZR16	168030	6	24.4	9.8	11.3	528	8.00 7.5-9.0	\$414
17	215/45ZR17**	168160	6	24.6	8.5	11.5	525	7.00 7.0-8.0	\$405
	225/45ZR17**	168170	6	25.0	9.1	11.6	517	7.50 7.0-8.5	\$423
	235/45ZR17	168190	6	25.3	9.5	11.7	510	8.00 7.5-9.0	\$432
	205/40ZR17**	168180	6	23.5	8.3	11.1	548	7.50 7.0-8.0	\$392
	235/40ZR17	156650	6	24.6	9.6	11.5	526	8.50 8.0-9.5	\$410
	245/40ZR17	168130	6	24.7	9.8	11.5	523	8.50 8.0-9.5	\$431
	255/40ZR17	168140	6	25.1	10.4	11.7	514	9.00 8.5-10.0	\$452
	275/40ZR17	168010	6	25.7	11.0	11.9	503	9.50 9.0-11.0	\$497
	315/35ZR17	168540	6	25.6	12.6	11.9	504	11.00 10.5-12.5	\$572
18	225/40ZR18**	168210	6	25.1	8.8	11.8	514	8.00 7.5-9.0	\$511
	235/40ZR18	168230	6	25.5	9.6	11.9	506	8.50 8.0-9.5	\$538
	245/40ZR18	159490	6	25.7	9.8	12.0	502	8.50 8.0-9.5	\$557
	275/40ZR18	168110	6	26.7	11.0	12.4	484	9.50 9.0-11.0	\$630
	255/35ZR18**	160980	6	25.1	10.2	11.8	515	9.00 8.5-10.0	\$648
	265/35ZR18**	168240	6	25.4	10.8	11.9	508	9.50 9.0-10.5	\$653
	275/35ZR18**	162800	6	25.7	11.0	12.0	503	9.50 9.0-11.0	\$668
	305/35ZR18	162810	6	26.3	12.4	12.2	491	11.00 10.0-12.0	\$744
	285/30ZR18**	168250	6	24.8	11.3	11.7	520	10.00 9.5-10.5	\$663
	295/30ZR18**	160960	6	25.1	11.8	11.8	515	10.50 10.0-11.0	\$707
	315/30ZR18**	162820	6	25.5	12.5	11.9	506	11.00 10.5-11.5	\$758
	335/30ZR18	162830	6	26.0	13.3	12.1	496	12.00 11.5-12.5	\$792
19	235/35ZR19	162850	6	25.7	9.5	12.1	503	8.50 8.0-9.5	\$624
	295/30ZR19**	162840	6	26.0	11.7	12.2	496	10.50 10.0-11.0	\$722
	305/30ZR19	168000	6	26.5	12.0	12.4	487	11.00 10.5-11.5	\$773
20	285/35ZR20	162980	6	27.7	11.5	13.0	465	10.00 9.5-11.0	\$768
	315/30ZR20	162990	6	27.6	12.5	12.9	469	11.00 10.5-11.5	\$834

**Reinforced

UTQG 100 AA A

Date:

Size:

Price:

Notes:

For warranty details and directions on registering your new Toyo Passenger, Light Truck, Van or SUV tires be sure to ask for your Toyo Gold Millennium Warranty Booklet at time of purchase.

Available from:

Toyo Tire Canada Inc.

1-877-682-TOYO (8696)

www.toyotires.ca



Mobile bar code - scan for more information on this product, videos, specials and features.

Mobile bar code reader - visit your mobile app store for a free reader.



Go Green
Printed on recycled paper



PROXES® R888™ Ultra High Performance Competition

The Proxes R888 is Toyo's next-generation competition tire, ideal for autoslalom, solosprint, road racing and high performance driving schools. It features an improved casing and tread design which enhance dry performance, while maintaining wet traction and control.



ENHANCED R-COMPOUND TREAD

>> Maximizes grip for better competitive handling and performance.



UNIDIRECTIONAL V-SHAPED TREAD DESIGN

>> Increased tread area and limited void improves dry traction while V-shaped grooves assist with wet traction.



CONTINUOUS CENTRE CONTACT

>> Increases braking performance and dry traction.



SEMI-SLICK SHOULDER AREA

>> Improves grip for better steering response.



STIFF BEAD CONSTRUCTION & WIDER TREAD WIDTH

>> Increases cornering force for better competitive handling.

SETUP GUIDELINES

- » Operating Temperature: 71°C to 104°C (160°F to 220°F)
- » Tire Pressure:

VEHICLE WEIGHT	COLD INFLATION PRESSURES	HOT INFLATION PRESSURES
Less than 800 kg.	17 – 22 psi	22 – 29 psi
800 kg. – 1000 kg.	20 – 26 psi	24 – 32 psi
1000 kg. – 1400 kg.	23 – 27 psi	28 – 40 psi
More than 1400 kg.	27 – 35 psi	37 – 42 psi

- » Camber: -1.0° to -3.0° (the Proxes R888 generally requires less negative camber than the Proxes RA1).
- » Caster: As much positive as possible.
- » Shaving: 4/32" is recommended for competition (grooves remain until 2/32").
- » Rim width: a tire size that falls within the range of midpoint to maximum rim widths is recommended.

PROXES R888 SAFETY ADVISORY

- » The tread compound is specifically designed to operate under racing conditions making it difficult to achieve optimum adhesion levels under normal street driving.
- » The shallower tread depth of 6/32nds limits the tire's performance capabilities under normal street driving conditions.
- » Performance limitations are particularly evident in low ambient temperatures or during the spring and fall when ambient temperatures fluctuate significantly.
- » Wet performance is limited when operating outside the optimum temperature range and when the tire is at less than full tread depth.
- » Do not use the tire if it has cracked.

OFF-SEASON/STORAGE

- » Remove from the vehicle and deflate to half the normal air pressure.
- » Do not store in temperatures below 0°C.
- » If stored outdoors, keep covered and do not expose to direct sunlight.


TEAM TOYO RACING PROGRAM

The Team Toyo Racing program provides registered racers with access and a membership discount on the Proxes R888 competition tire.

REGISTER FOR THE PROGRAM AT:

www.toyotires.ca

Team
TOYO
RACING

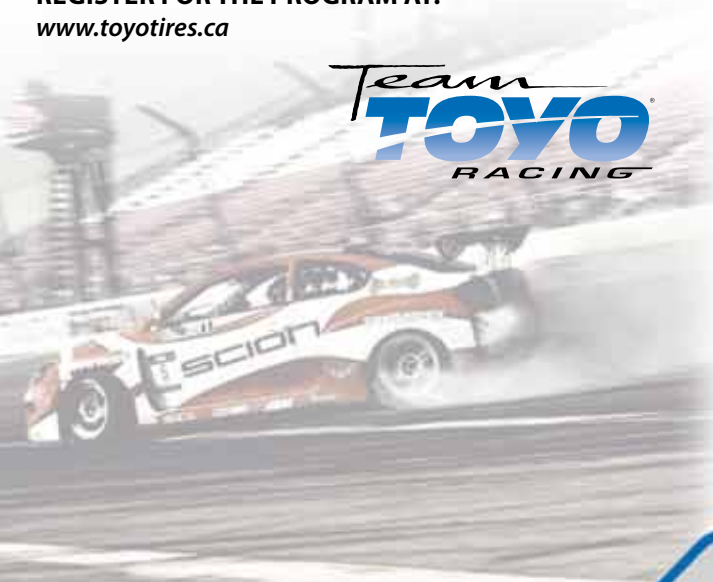

Tmode

UTQG
100 AA A

